


E12 Series with Molded Lead HIRSCHMANN (continued)

E12 4P F angled

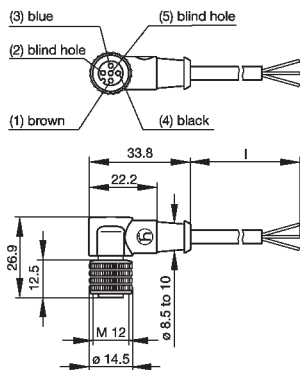

Technical Parameters	E12-AC4A1A-FB0200C1-XA500-AC	E12-AC4A1A-FB0500C1-XA500-AB	E12-AC4A1A-FB1000C1-XA500-AA
Marking *	RKWT 4-225/2M	RKWT 4-225/5M	RKWT 4-225/10M
Type	angled cable plug		
Number of contacts	4	4	4
Thread diameter	12 mm	12 mm	12 mm
Cable material	PUR	PUR	PUR
Cable type	Li9YH-11YH	Li9YH-11YH	Li9YH-11YH
Cable length	2m	5m	10m
Conductor size	0,34 mm ²	0,34 mm ²	0,34 mm ²
Rated voltage	250 V DC/AC	250 V DC/AC	250 V DC/AC
Rated current	4 A	4 A	4 A
Protection class	IP65	IP65	IP65

* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
 E12-AC4A1A-FB0200C1-XA500-AC	934552-013	69745
 E12-AC4A1A-FB0500C1-XA500-AB	934552-014	69746
 E12-AC4A1A-FB1000C1-XA500-AA	934552-036	69744

Technical Parameters	E12-AC4A1A-AD0200C1-XA500-AC	E12-AC4A1A-AD0500C1-XA500-AB	E12-AC4A1A-AD1000C1-XA500-AA
Marking *	RKWT 4-07/2M	RKWT 4-07/5M	RKWT 4-07/10M
Type	angled cable plug		
Number of contacts	4	4	4
Thread diameter	12 mm	12 mm	12 mm
Cable material	PVC	PVC	PVC
Cable type	LiYY	LiYY	LiYY
Cable length	2m	5m	10m
Conductor size	0,34 mm ²	0,34 mm ²	0,34 mm ²
Rated voltage	250 V DC/AC	250 V DC/AC	250 V DC/AC
Rated current	4 A	4 A	4 A
Protection class	IP65	IP65	IP65


* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
 E12-AC4A1A-AD0200C1-XA500-AC	934552-009	69741
 E12-AC4A1A-AD0500C1-XA500-AB	934552-010	69742
 E12-AC4A1A-AD1000C1-XA500-AA	934552-035	69743

ELKA Series


 HIRSCHMANN

ELKA x008 V





Technical Parameters	ELKA 3008 V	ELKA 4008 V
Marking *	RKMCK 3	RKMCK 4
Type	straight cable socket	straight cable socket
Number of contacts	3	4
Conductor size	0,14 - 0,34 mm ²	0,14 - 0,34 mm ²
Cable diameter	4 - 5 mm	4 - 5 mm
Rated voltage	60 V AC/DC	30 V AC/DC
Rated current	3 A	3 A
Type of termination	pin penetration	pin penetration
Protection class	IP67	IP67
Operating temperature	-25°C to 70°C	-25°C to 70°C

* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
 ELKA 3008 V	933366-100	44042
 ELKA 4008 V	933367-100	57406



ELKA 4012 PG7 Black

ELKA 4012 PG9



Technical Parameters	ELKA 4012 PG7 Black	ELKA 4012 PG9
Marking *	RKC 4/7	RKC 4/9
Type	straight socket	straight socket
Number of contacts	4	4
Conductor size	max. 0,75 mm ²	max. 0,75 mm ²
Cable diameter	4 - 6 mm	6 - 8 mm
Rated voltage	250 V AC/DC	250 V AC/DC
Rated current	4 A	4 A
Type of termination	screw	screw
Protection class	IP67	IP67
Operating temperature	-25°C to 90°C	-25°C to 90°C

* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
 ELKA 4012 PG7	933139-100	38129
 ELKA 4012 PG9	933169-100	1647

ELKA 5012 PG9

Technical Parameters	ELKA 5012 PG9
Marking *	RKC 5/9
Type	straight socket
Number of contacts	5
Conductor size	max. 0,75 mm ²
Cable diameter	6 - 8 mm
Rated voltage	250 V AC/DC
Rated current	4 A
Type of termination	screw
Protection class	IP67
Operating temperature	-25°C to 90°C

* Alternative supplies also marked as LUMBERG. Hirschmann and Lumberg companies belong to the BELDEN group.

Part No.	Manuf. No.	Ord.No.
 ELKA 5012 PG9	933171-100	42885