



SK 104 STC Series

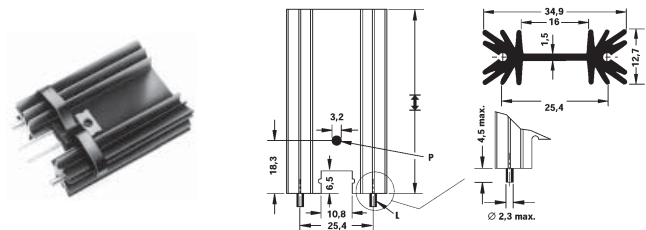

| Part No. | Rth | Mat./Surface | for Transistor | Length |
|-----------------------|--------|--------------------------|--|--------|
| SK 104/25,4/STC/TO220 | 14 K/W | aluminium/black anodised | TO-220 with solder pins clip THF104 required | 25,4mm |
| SK 104/38,1/STC/TO220 | 11 K/W | aluminium/black anodised | TO-220 with solder pins clip THF104 required | 38,1mm |

| Part No. | Ord.No. |
|-------------------------|---------|
| S SK 104/25,4/STC/TO220 | 8011 |
| S SK 104/38,1/STC/TO220 | 8012 |


SK 104 STS Series

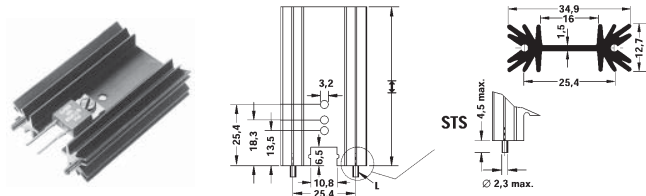

| Part No. | Rth | Mat./Surface | for Transistor | Length |
|-----------------|--------|--------------------------|---|--------|
| SK 104/25,4/STS | 14 K/W | aluminium/black anodised | TO-220 with solder pins and insulating ring | 25,4mm |
| SK 104/38,1/STS | 11 K/W | aluminium/black anodised | TO-220 with solder pins and insulating ring | 38,1mm |
| SK 104/50,8/STS | 9 K/W | aluminium/black anodised | TO-220 with solder pins and insulating ring | 50,8mm |

| Part No. | Ord.No. |
|-------------------|---------|
| S SK 104/25,4/STS | 25670 |
| S SK 104/38,1/STS | 25671 |
| S SK 104/50,8/STS | 8015 |


SK 451/84/SA

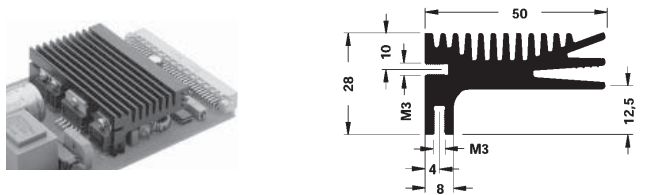

| Part No. | Rth | Mat./Surface | for Transistor | Width |
|--------------|-------|--------------------------|--|-------|
| SK 451/84/SA | 4 K/W | aluminium/black anodised | TO220, TO218, PEN-TAWATT for use on Euro cards, profile thread | 84mm |

| Part No. | Ord.No. |
|----------------|---------|
| S SK 451/84/SA | 8018 |


THF 104

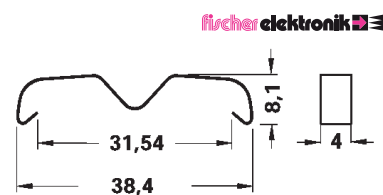

| Part No. | Description |
|----------|---|
| THF 104 | for transistor-design TO 220, TO 3 P, TO 247, TO 248 suitable for heatsinks SK104 |

| Part No. | Ord.No. |
|-----------|---------|
| S THF 104 | 8014 |

D xx Series

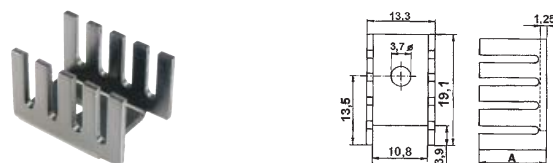

| Part No. | Thermal Res. | Material/Surface Finish | Description |
|----------|--------------|--------------------------|-------------|
| D 01 | 27 K/W | Aluminium/non-anodised | A=12,7mm |
| D 01 A | 21 K/W | Aluminium/black anodised | A=12,7mm |
| D 02 | 28 K/W | Aluminium/non-anodised | A=9,53mm |
| D 02 A | 22 K/W | Aluminium/black anodised | A=9,53mm |
| D 03 | 31 K/W | Aluminium/non-anodised | A=6,35mm |

| Part No. | Ord.No. |
|----------|---------|
| S D 01 | 2339 |
| S D 01 A | 6417 |
| S D 02 | 2469 |
| S D 02 A | 2462 |
| S D 03 | 4944 |