



PCB mounted - vertical

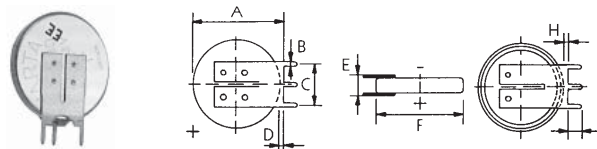

Part No.	Voltage	Capacity	Dimensions
CR 2032 SLF	3V	230mAh	20x3,2 mm
CR 2430 SLF	3V	280mAh	26x4 mm

Part No.	Ord.No.
S CR 2032 SLF	3827
S CR 2430 SLF	5380

PCB mounted - horizontally



Part No.	Voltage	Capacity	Description	Dimensions
CR 2032 PCB	3V	230mAh	3-pin	20x3,2 mm
CR 2450 PCB	3V	560mAh	2-pin	25x5 mm

Part No.	Ord.No.
S CR 2032 PCB	29757
S CR 2450 PCB	6597

LS Series



Part No.	Voltage	Capacity	Part No.	Description
LS 14500 CNA	3,6V	2250mAh	AA	axial outlets
CR 2450 PCB	3V	560mAh	2-pin	25x5 mm

Part No.	Ord.No.
S LS 14500 CNA	33494
S CR 2450 PCB	6597

Cross Reference Table XENO

Size	Terminal	Dimensions	XENO	SAFT	SONNENSCHN			
1/2AA		14,5x25,2mm	XENO XL-050F	1,2Ah	LS 14250	1,1Ah	SL-350/S	1,2Ah
1/2AA	axial	14,5x25,2mm	XENO XL-050F AX	1,2Ah	LS 14250 CNA	1,1Ah	SL-350/P	1,2Ah
1/2AA	terminal leads	14,5x25,2mm	XENO XL-050F T1	1,2Ah	LS 14250 CNR	1,1Ah	SL-350/T	1,2Ah
1/2AA	3 pins into PCB	14,5x25,2mm	XENO XL-050F T3	1,2Ah	LS 14250 3PF	1,1Ah	SL-350/PT	1,2Ah
2/3AA		14,5x33,5mm	XENO XL-055F	1,65Ah			SL-361/S	1,6Ah
2/3AA	axial	14,5x33,5mm	XENO XL-055F AX	1,65Ah			SL-361/P	1,6Ah
2/3AA	terminal leads	14,5x33,5mm	XENO XL-055F T1	1,65Ah			SL-361/T	1,6Ah
2/3AA	3 pins into PCB	14,5x33,5mm	XENO XL-055F T3	1,65Ah			SL-361/PT	1,6Ah
AA		14,5x55,5mm	XENO XL-060F	2,4Ah	LS 14500	2,45Ah	SL-360/S	2,4Ah
AA	axial	14,5x55,5mm	XENO XL-060F AX	2,4Ah	LS 14500 CNA	2,45Ah	SL-360/P	2,4Ah
AA	terminal leads	14,5x55,5mm	XENO XL-060F T1	2,4Ah	LS 14500 CNR	2,45Ah	SL-360/T	2,4Ah
AA	3 pins into PCB	14,5x55,5mm	XENO XL-060F T3	2,4Ah	LS 14500 3PF	2,45Ah	SL-360/PT	2,4Ah
C		26,2x50mm	XENO XL-140F	7,2Ah	LSH 14	5,5Ah	SL-770/S	7,2Ah
C	terminal leads	26,2x50mm	XENO XL-140F T1	7,2Ah	LSH 14 CNR	5,5Ah	SL-770/T	7,2Ah
C		26,2x50mm	XENO XL-145F	8,5Ah	LS 26500	7,7Ah	SL-2770/S	8,5Ah
C	terminal leads	26,2x50mm	XENO XL-145F T1	8,5Ah	LS 26500 CNR	7,7Ah	SL-2770/T	8,5Ah
D		33,6x60mm	XENO XL-200F	16,5Ah	LSH 20	13Ah	SL-780/S	16,5Ah
					LS 33600	17Ah		
D	terminal leads	33,6x60mm	XENO XL-200F T1	16,5Ah	LSH 20 CNR	13Ah	SL-780/T	16,5Ah
					LS 33600 CNR	17Ah		
D		33,6x60mm	XENO XL-205F	19Ah	LS 33600 C	18,5Ah	SL-2780/S	19Ah
D	terminal leads	33,6x60mm	XENO XL-205F T1	19Ah	LS 33600 C CNR	18,5Ah	SL-2780/T	19Ah

XENO Series- 3,6V



General characteristics of XENO batteries:
 High Steady Operating Voltage:
 Nominal Voltage:3.6V
 Operating Voltage 3.4V
 Improved Transient Minimum Voltage Effect
 Very Low Self-Discharge Rate (Self-discharge 1 up to 2% per year at room temperature)
 Superior Storage Capability (10 Years)
 Pulse Current up to Medium Current
 Highest Reliability and Safety
 Operating temperature range: -55°C up to +85°C

WITH PINS INTO PCB

Part No.	Ord.No.	Description
S XL-050F T3	49193	1/2AA, 3,6V/1200 mAh
O XL-055F T3	49196	2/3AA, 3,6V/1650 mAh
O XL-060F T3	49200	AA, 3,6V/2400 mAh

WITH AXIAL TERMINALS

Part No.	Ord.No.	Description
S XL-050F AX	49191	1/2AA, 3,6V/1200 mAh
S XL-055F AX	49195	2/3AA, 3,6V/1650 mAh
S XL-060F AX	49198	AA, 3,6V/2400 mAh

WITH TERMINAL LEADS

Part No.	Ord.No.	Description
S XL-050F T1	49192	1/2AA, 3,6V/1200 mAh
O XL-055F T1	48811	2/3AA, 3,6V/1650 mAh
S XL-060F T1	49199	AA, 3,6V/2400 mAh
S XL-140F T1	49202	C, 3,6V/7200 mAh
O XL-145F T1	49204	C, 3,6V/8500 mAh
O XL-200F T1	49206	D, 3,6V/16500 mAh
O XL-205F T1	49209	D, 3,6V/19000 mAh

STANDARD

Part No.	Ord.No.	Description
S XL-050F	48983	1/2AA, 3,6V/1200 mAh
O XL-055F	49194	2/3AA, 3,6V/1650 mAh
S XL-060F	49197	AA, 3,6V/2400 mAh
S XL-140F	49201	C, 3,6V/7200 mAh
S XL-145F	49203	C, 3,6V/8500 mAh
S XL-200F	49205	D, 3,6V/16500 mAh
S XL-205F	49208	D, 3,6V/19000 mAh