


PK 21N30 WQ



24 mm

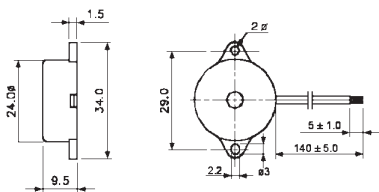


Technical Parameters	PK 21N30 WQ
Sound Frequency	3,0 kHz
Operating Voltage	1,5 - 30 VDC
SPL at 5V	80 dB/10cm
Current Consumption	12 mA
Operating Temperature	-20°C to +70°C

Part No.	Ord.No.
S PK 21N30 WQ	4926

PK 27N35 PQ



30 mm

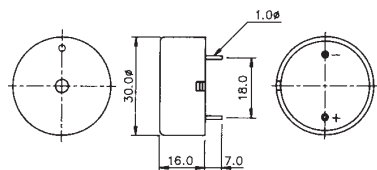


Technical Parameters	PK 27N35 PQ
Sound Frequency	3,5 kHz
Operating Voltage	3 - 28 VDC
SPL at 5V	90 dB/10cm
Current Consumption	15 mA
Operating Temperature	-20°C to +70°C

Part No.	Ord.No.
S PK 27N35 PQ	5141

PK 35N29 WQ




42 mm

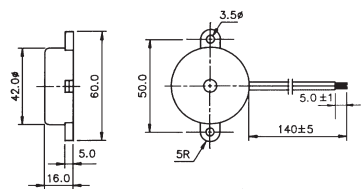

Technical Parameters	PK 35N29 WQ
Sound Frequency	2,9 kHz
Operating Voltage	3 - 28 VDC
SPL at 5V	90 dB/10cm
Current Consumption	10 mA
Operating Temperature	-20°C to +70°C

Part No.	Ord.No.
S PK 35N29 WQ	6541

PK 35N29 EPQ

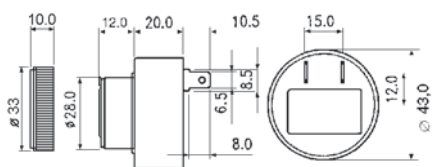

Technical Parameters	PK 35N29 EPQ
Sound frequency	2,9 kHz
Operating Voltage	3 - 28 VDC
SPL at 5V	90 dB/10cm
Current Consumption	8 mA
Operating Temperature	-20°C to +70°C


Part No.	Ord.No.
O PK 35N29 EPQ	7744

DC Type Magnetic Buzzers

PB 12N23P05Q



12 mm




Technical Parameters	PB 12N23P05Q
Sound frequency	2,3 kHz
Operating Voltage	4,5 - 5,5 VDC
SPL	85 dB/10cm
Current Consumption	50 mA
Operating Temperature	-20°C to +70°C

Part No.	Ord.No.
S PB 12N23P05Q	8037

PB 12N23P12Q



12 mm

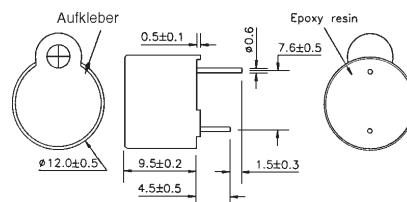


Technical Parameters	PB 12N23P12Q
Sound Frequency	2,3 kHz
Operating Voltage	9 - 15 VDC
SPL	85 dB/10cm
Current Consumption	50 mA
Operating Temperature	-20°C to +70°C

Part No.	Ord.No.
S PB 12N23P12Q	8038

PEB 90 S



34 mm

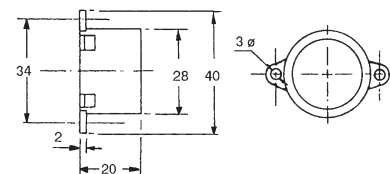

Technical Parameters	PEB 90 S
Sound Frequency	2,8 kHz
Operating Voltage	6 - 11 VDC
SPL	90 dB/30cm
Current Consumption	40 mA
Operating Temperature	-20°C to +60°C


Part No.	Ord.No.
S PEB 90 S	11258

AC Type Magnetic Buzzers

ALP-60P



12 mm

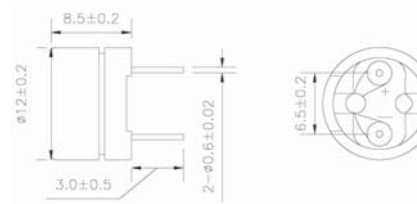

Technical Parameters	ALP-60P
Sound Frequency	2,048 kHz
Max. Operating Voltage	1,5 VAC
SPL	85 dB/10 cm
Current Consumption	32 mA
Operating Temperature	-20°C to +60°C

Part No.	Ord.No.
S ALP-60P	11262