


Electret Microphones

MCE 100

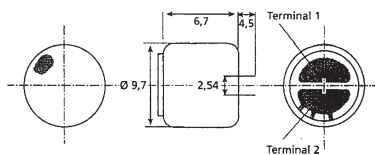


PCB

Technical Parameters	MCE 100
Frequency Range	50 - 10 000 Hz
Operating Voltage	1,5 - 10 V
Current Consumption	0,5 mA
Output Impedance	2000 Ω
Sensitivity	-5,6 mV/Pa (1 kHz)

Part No.	Ord.No.
S MCE 100	11261

MCE 101

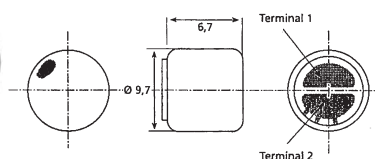


with 140mm cable

Technical Parameters	MCE 101
Frequency Range	50 - 10 000 Hz
Operating Voltage	1,5 - 10 V
Current Consumption	0,5 mA
Output Impedance	2000 Ω
Sensitivity	-5,6 mV/Pa (1 kHz)

Part No.	Ord.No.
S MCE 101	4931


EKM62



Technical Parameters	EKM62
Frequency Range	50 - 10 000 Hz
Operating Voltage	1,5 - 10 V
Current Consumption	0,4 mA
Output Impedance	2000 Ω
Sensitivity	-62 dB

Part No.	Ord.No.
S EKM62	8042

PMOF6050NS-45U

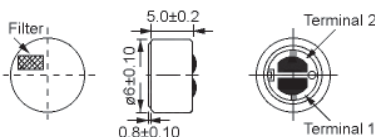

Technical Parameters	PMOF6050NS-45U
Frequency Range	20 - 16 000 Hz
Operating Voltage	1 - 10 V
Current Consumption	0,5 mA
Output impedance	2200 Ω
Sensitivity	-65 dB

Part No.	Ord.No.
S PMOF6050NS-45U	4551

Dynamic Microphones

CD 202



Technical Parameters	CD 202
Frequency Range	100 - 12 500 Hz
Impedance	600 Ω
Sensitivity	-77 dB
Connector	Jack 6,3 mm
Cable Length	2,5 m
Weight	110 g

Part No.	Ord.No.
S CD 202	60458

DM-222



Technical Parameters	DM-222
Frequency Range	50 - 12 500 Hz
Impedance	600 Ω
Connector	XLR / Jack 6,3 mm
Cable Length	3 m
Weight	190 g

Part No.	Ord.No.
S DM-222	46145

EH-002



Technical Parameters	EH-002
Frequency Range	50 - 15 000 Hz
Impedance	600 Ω
Sensitivity	-54 dB
Connector	XLR / Jack 6,3 mm
Cable Length	5 m
Weight	285 g

Part No.	Ord.No.
S EH-002	62242